



TECHNICAL INFORMATION

ICE-LC

DESCRIPTION

ICE-LC – Local Controller

The Local Controller controls the handling of motorised damper, light and other accessories needed to operate the local workstation. All sensors in the PlymoVent range can be used. ICE-LC has a pre-set after-run time of 15sec.

Must be completed with motorised damper and activation sensor, see accessories.

TECHNICAL DATA

Unit Data

Dimensions 175 x 175 x 100 mm
6,9 x 6,9 x 4"
Weight 1,85 kg / 4 lbs

Enclosure

Material Polycarbonate
Protection rating IP66
Flame resistance UL94-V2
Color Black

Environment

Operating temperature 0 to 40° C / 32 to 105° F
Storage temperature -10 to -65°C / 15 to 145°F
Humidity Max 95% non-condensin

Electrical data

Supply voltage 110-120/208-240 VAC
Frequency 50 / 60 Hz
Outputs 24VAC light and damper
Interlink Yes
Input Sensor or switch

Mounting

Wall mounting 4 x Ø6mm / 1/4" holes



Cable connections

Screw terminals

After-run time

Standard 15 seconds
Adjustable Yes, 7 sec to 6 min.

MEASUREMENTS

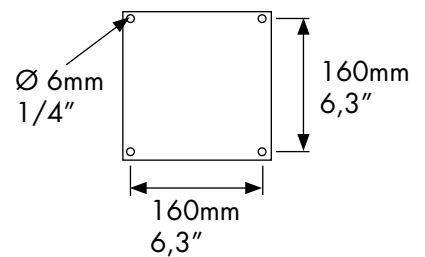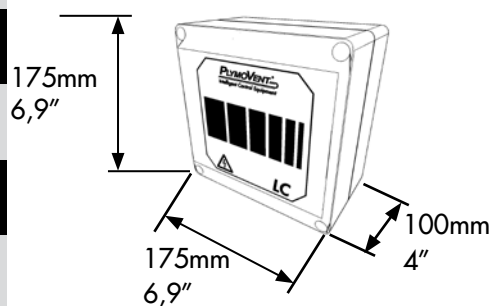

PLYMOVENT®

www.plymovent.com